


365

FILTRO A Y - COPERCHIO
FILETTATO - OTTONE -
RETE INOX - PN 16

Y STRAINER - SCREWED
COVER - BRASS -
INOX SCREEN - 100 LBS

**WORKING
PRESSURES**
W.O.G. NON SHOCK
225 p.s.i.

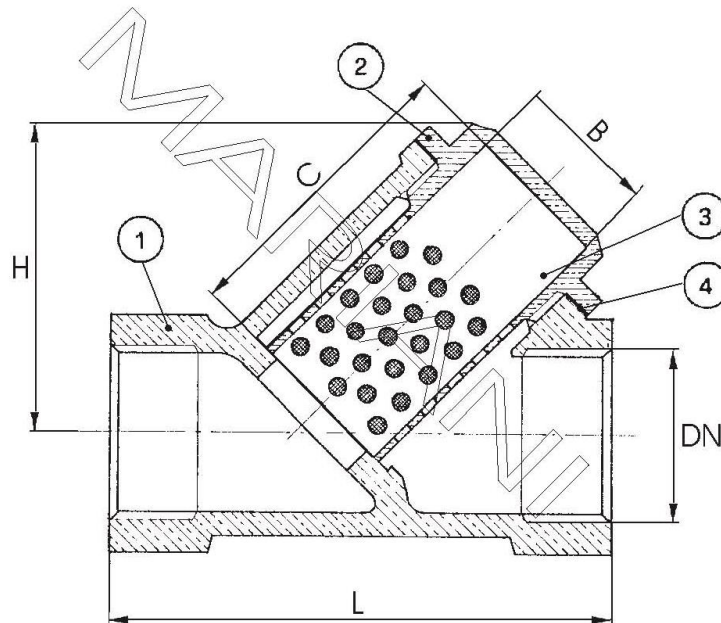

CONFORM TO: MSS SP 80
BS 5154/B
SCREEN RHOMBOIDAL MESH = 0.45mm

366

FILTRO A Y - COPERCHIO
FILETTATO - BRONZO - NI/AL
BRONZE - RETE INOX - PN 16

Y STRAINER - SCREWED
COVER - BRONZE - NI/AL
BRONZE - INOX SCREEN - 100 LBS

**WORKING
PRESSURES**
W.O.G. NON SHOCK
225 p.s.i.

OPTIONAL FEATURES: 1) SCREEN MONEL K500
(for AL/BZ body)

	DESCRIZIONE	DESCRIPTION	365	366	
			OT(Brass)	BZ (Bronze)	AL/BZ (Aluminum/Bronze)
1	CORPO	BODY	BRASS ASTM B283	BRONZE ASTM B62	ASTM B148 C95800
2	COPERCHIO	COVER	BRASS ASTM B283	BRASS ASTM B283	ASTM B148 C95800
3	FILTRO	SCREEN	ASTM A182 F304	ASTM A182 F304	ASTM A182 F316
4	GUARNIZIONE	GASKET	FIBER	FIBER	P.T.F.E.

THREADING: GAS (ISO 7/1 Rp) FEMALE PARALLEL or NPT (ANSI B1.20.1)

	DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
365	L	50	50	56	66	78	101	113	126	156	170	-
	B	10	10	15	20	25	32	40	50	65	80	-
	H	33	33	37	43	50	60	73	85	100	123	-
	Kg	0.090	0.090	0.130	0.190	0.330	0.620	0.870	1.340	2.250	2.990	-

	DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
366	L	-	55	58	84	90	105	115	147	170	172	226
	B	-	16	17	27	30	36	40	57	68	75	102
	C	-	29	30	39	45	56	65	83	101	102	143
	H	-	40	41	48	56	64	73	92	130	138	178
	Kg	-	0.118	0.180	0.380	0.460	0.720	0.900	1.600	2.610	3.700	6.800