


**VALVOLA A SARACINESCA – VITONE AVVITATO – ASTA NON SALIENTE –
CUNEO SOLIDO – BRONZO – PN16**

**GATE VALVE - SCREWED BONNET - NON RISING STEM -
SOLID WEDGE - BRONZE – 100 LBS**

**WORKING
PRESSURES**
W.O.G. NON SHOCK
225 p.s.i.

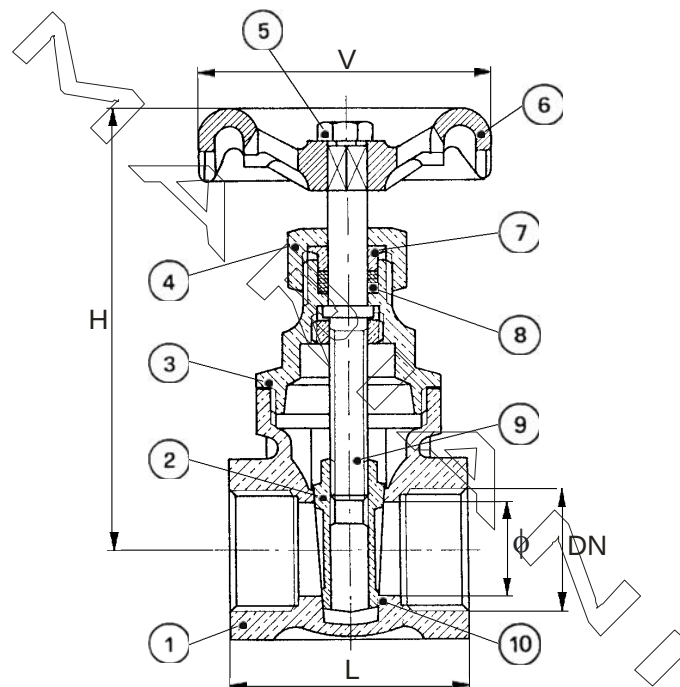

**CONFORM TO: BS 5154
MSS SP 80**

	DESCRIZIONE	DESCRIPTION	MATERIAL
1	CORPO	BODY	BRONZE ASTM B62
2	CUNEO	WEDGE	ASTM B283
3	VITONE	BONNET	ASTM B283
4	DADO PREMISTOPPA	GLAND NUT	ASTM B16
5	DADO	NUT	ZINC PLATED STEEL
6	VOLANTINO	HANDWHEEL	CARBON STEEL
7	PREMISTOPPA	THRUST WASHER	ASTM B16
8	BADERNA	STEM PACKING	GRAPHITE TEFLONED
9	ASTA	STEM	ASTM B16
10	SEDE INTEGRALE	INTEGRAL SEAT	BRONZE ASTM B62

THREADING: NPT (ANSI B1.20.1) or BSP (ISO 228/1)

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
Ø	11	13	15	20	25	32	40	50	65	80	100	118	142
L	36	38	42	46	49	56	61	68	78	80	99	113	121
H	66	66	68	78	92	108	125	195	195	200	260	325	360
V	45	45	45	50	55	60	70	80	100	100	120	175	200
Kg	0.170	0.170	0.190	0.285	0.370	0.575	0.800	1.200	2.060	2.700	4.700	10.400	15.400