


**VALVOLA A GLOBO – UNION BONNET – ASTA SALIENTE –
BRONZO – Ni/Al BRONZE – ANSI 150-300**

**GLOBE VALVE - UNION BONNET - RISING STEM –
BRONZE – Ni/Al BRONZE – ANSI 150-300**

**WORKING
PRESSURES**
W.O.G. NON SHOCK
350 p.s.i.

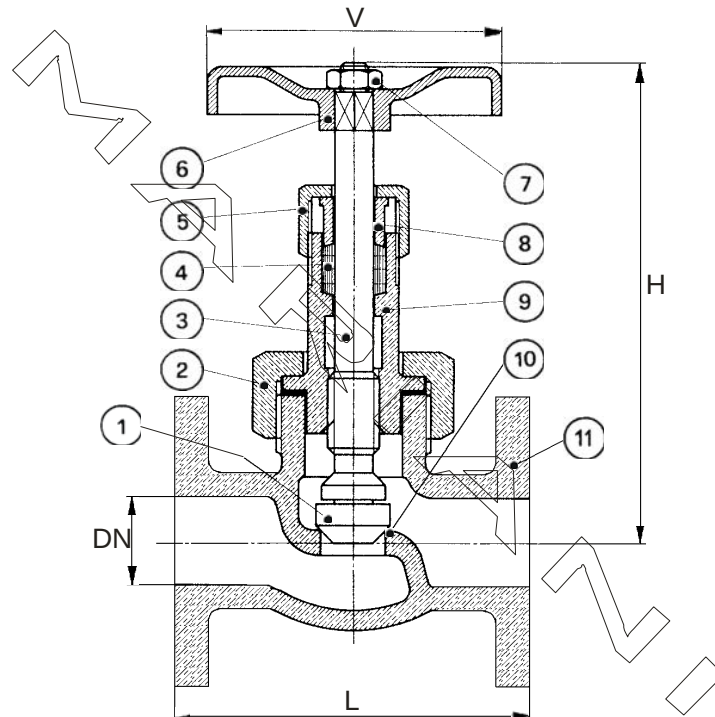

CONFORM TO: BS 5154
MSS SP 80
ANSI B16.24 / BS 1560 3.3 (FLAT FACE)
LENGTH BS 5154 "LONG" FACE TO FACE
BACKSEAT

OPTIONAL TRIM MATERIALS: ASTM B61 C92200
ASTM A182 F316
MONEL K500

	DESCRIZIONE	DESCRIPTION	BZ (Bronze)	Al/BZ (Aluminium/ Bronze)
1	OTTURATORE	DISC	BRONZE ASTM B62	ASTM B148 C95800
2	CALOTTA	UNION-NUT	ASTM B16	ASTM B16
3	ASTA	STEM	BRONZE ASTM B62	ASTM B150 C63200
4	BADERNA	STEM PACKING	GRAPHITE TEFLONED	GRAPHITE TEFLONED
5	DADO PREMISTOPPA	GLAND NUT	ASTM B16	ASTM B16
6	VOLANTINO	HANDWHEEL	CARBON STEEL	CARBON STEEL
7	DADO	NUT	ZINC PLATED STEEL	ZINC PLATED STEEL
8	PREMISTOPPA	THRUST WASHER	ASTM B16	ASTM B148 C95800
9	VITONE	BONNET	BRONZE ASTM B62	ASTM B148 C95800
10	SEDE INTEGRALE	INTEGRAL SEAT	BRONZE ASTM B62	ASTM B148 C95800
11	CORPO	BODY	BRONZE ASTM B62	ASTM B148 C95800

FLANGED ENDS: ANSI B16.5 (ANSI B16.24 THICKNESS) 150 FF/RF or DIN 2501 PN 10-16

SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"	3"
DN	15	20	25	32	40	50	80
L	107	117	127	146	158	190	215
H (OPEN)	154	145	172	190	203	265	280
V	70	80	80	90	100	125	150
Kg	2.000	2.750	4.000	5.450	6.400	9.400	12.600