
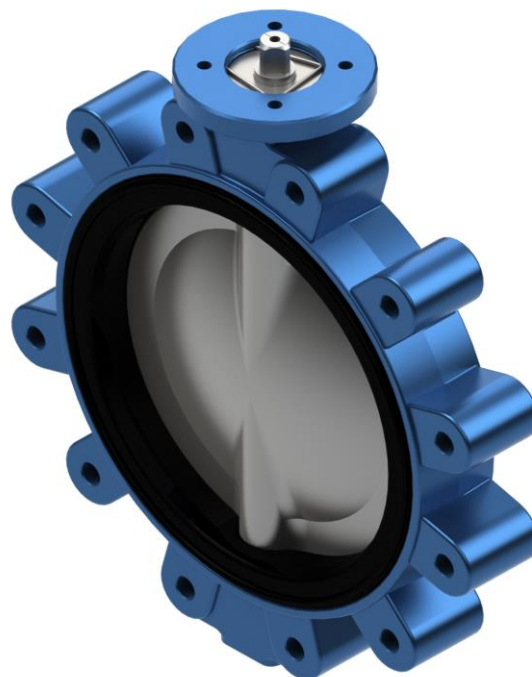


Body	Ductile Iron EN 1563 - GJS500-7
Shaft	Stainless Steel ASTM A182 F304
Disc	Stainless Steel ASTM A351 CF 8M
Seat	Hypalon
Temperature	-10°C up to +80°C
Tolerances	ISO 2768-M
Face to Face	EN 558 Series 20 ISO 5752 Series 20 API 609 Table 1 BS 5155 Series 4
Pressure test according to:	EN 12266-1, ISO 5208: Body: 1.5×PN Seat: 1.1×PN
Mounting between flanges	PN10/16 ISO 7005, DIN 2501, EN 1092-1 ANSI class 150: ANSI B16.5
Tightness test	ISO 5208, zero leakage API 598

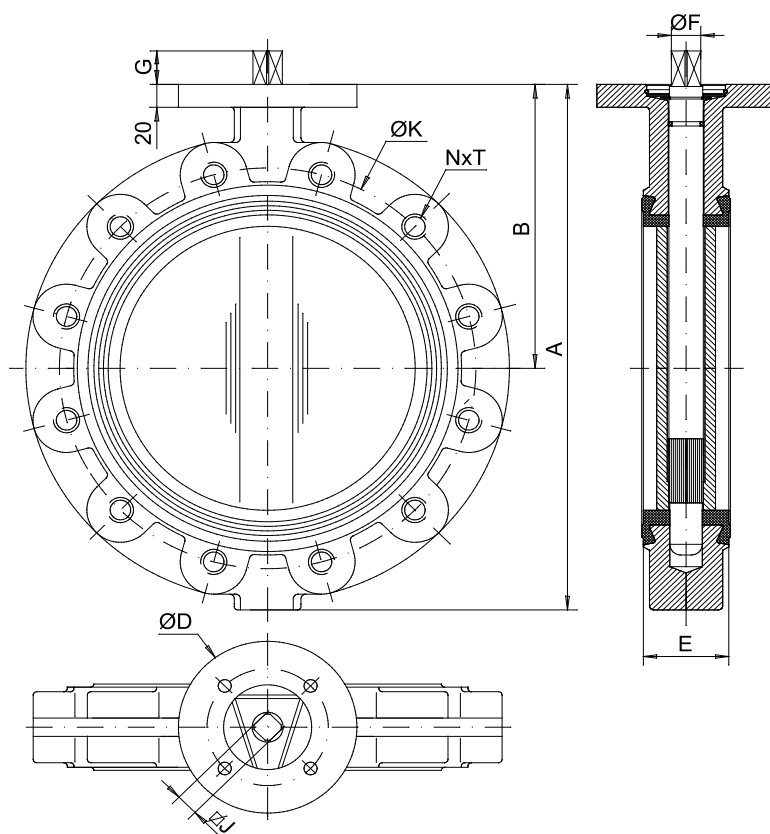

(Note) dimensions and standards may vary without announcement. Colours are orientative.

DN		A	B	D	E	F	G	J	PN10		PN16		ANSI150		ISO 5752	Weight
mm	inch								K	N°×T1	K	N°×T1	K	N°×T1	Connection	Kg
250	10"	460	248	150	68	25	24	19	350	12×M20	355	12×M24	362	12×7/8"	F10	28,5
300	12"	523	280	150	78	28	24	22	400	12×M20	410	12×M24	431.8	12×7/8"	F10	42
350	14"	570	300	170	78	28	29	22	460	16×M20	470	16×M24	476.3	12×1"	F14	53
400	16"	644	340	170	102	35	29	27	515	16×M24	525	16×M27	539.8	16×1"	F14	77