
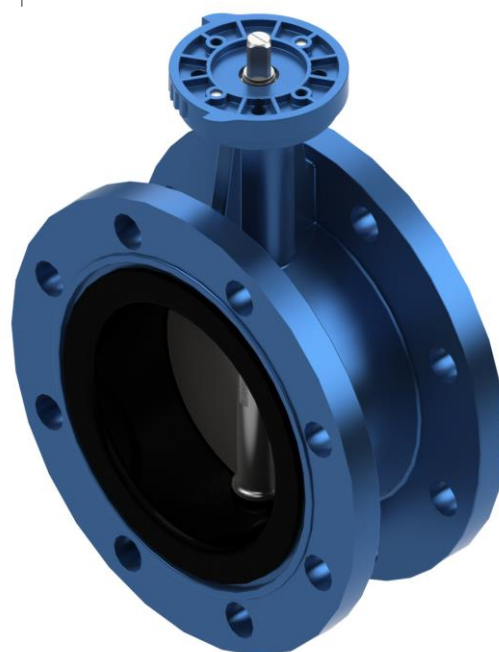


Body	Ductile Iron EN 1563 - GJS500-7
Shaft	Stainless Steel ASTM A182 F304
Disc	Stainless Steel ASTM A351 CF 8M
Seat	EPDM (Vulcanized)
Temperature	-20°C up to +110°C
Tolerances	ISO 2768-M
Face to Face	EN 558 Series 13 ISO 5752 Series 13 API 609 Table 3
Pressure test according to:	EN 12266-1, ISO 5208: Body: 1.5×PN Seat: 1.1×PN
Mounting between flanges	PN10/16 ISO 7005, DIN 2501, EN 1092-1 ANSI class 150: ANSI B16.5
Tightness test	ISO 5208, zero leakage API 598

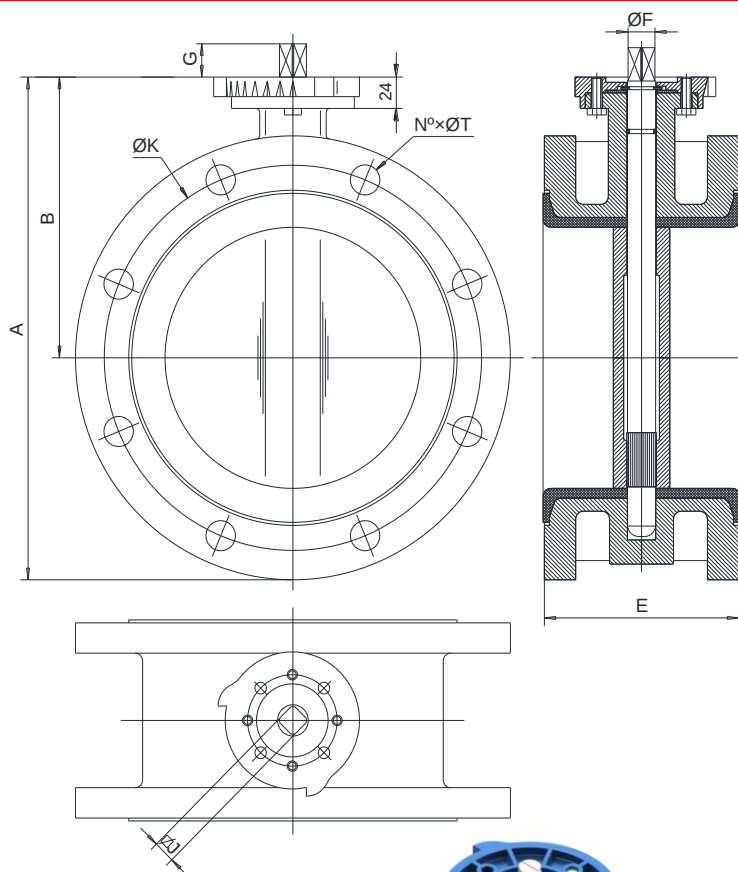

(Note) dimensions and standards may vary without announcement. Colours are orientative.

DN		A	B	D	E	F	G	J	PN10		PN16		ANSI150		ISO 5752	Weight
mm	inch								K	N°×ØT	K	N°×ØT	K	N°×ØT	Connection	Kg
50	2"	239	156	88	108	9,8	14	8	125	4×19	125	4×19	120,6	4×19	F5/F7	8
65	2 1/2"	253	160	88	112	12	16	9	145	4×19	145	4×19	139,7	4×19	F5/F7	8,5
80	3"	268	168	88	114	14	16	11	160	8×19	160	8×19	152,4	4×19	F5/F7	10,5
100	4"	300	185	88	127	14	20	11	180	8×19	180	8×19	190,5	8×19	F5/F7	12
125	5"	335	207	105	140	18	20	14	210	8×19	210	8×19	215,9	8×23	F7	16
150	6"	358	215	105	140	18	20	14	240	8×23	240	8×23	241,3	8×23	F7	22
200	8"	425	256	105	152	22	24	17	295	8×23	295	12×23	298,5	8×23	F7	30