
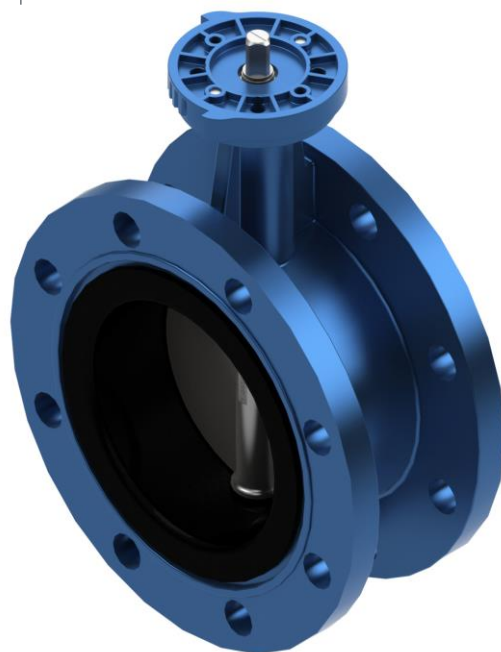


Body	Ductile Iron EN 1563 - GJS500-7
Shaft	Stainless Steel ASTM A182 F304
Disc	Stainless Steel ASTM A351 CF 8M
Seat	NBR (Vulcanized)
Temperature	-10°C up to +80°C
Tolerances	ISO 2768-M
Face to Face	EN 558 Series 13 ISO 5752 Series 13 API 609 Table 3
Pressure test according to:	EN 12266-1, ISO 5208: Body: 1.5×PN Seat: 1.1×PN
Mounting between flanges	PN10/16 ISO 7005, DIN 2501, EN 1092-1! ANSI class 150: ANSI B16.5
Tightness test	ISO 5208, zero leakage API 598

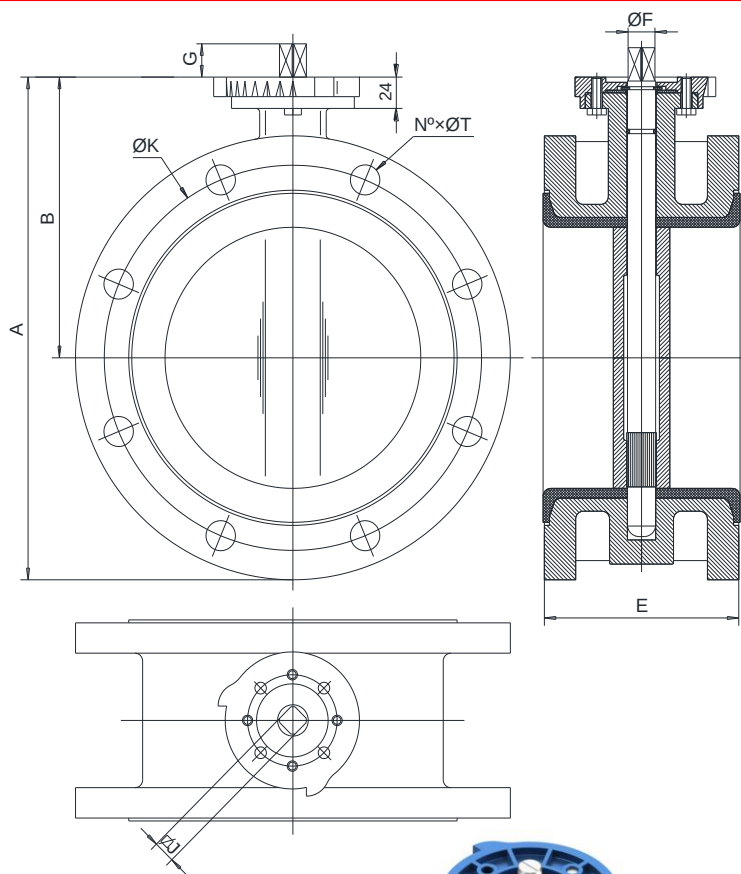

(Note) dimensions and standards may vary without announcement. Colours are orientative.

DN		A	B	D	E	F	G	J	PN10		PN16		ANSI150		ISO 5752	Weight
mm	inch								K	N°xØT	K	N°xØT	K	N°xØT	Connection	Kg
50	2"	239	156	88	108	9,8	14	8	125	4x19	125	4x19	120,6	4x19	F5/F7	8
65	2 1/2"	253	160	88	112	12	16	9	145	4x19	145	4x19	139,7	4x19	F5/F7	8,5
80	3"	268	168	88	114	14	16	11	160	8x19	160	8x19	152,4	4x19	F5/F7	10,5
100	4"	300	185	88	127	14	20	11	180	8x19	180	8x19	190,5	8x19	F5/F7	12
125	5"	335	207	105	140	18	20	14	210	8x19	210	8x19	215,9	8x23	F7	16
150	6"	358	215	105	140	18	20	14	240	8x23	240	8x23	241,3	8x23	F7	22
200	8"	425	256	105	152	22	24	17	295	8x23	295	12x23	298,5	8x23	F7	30