
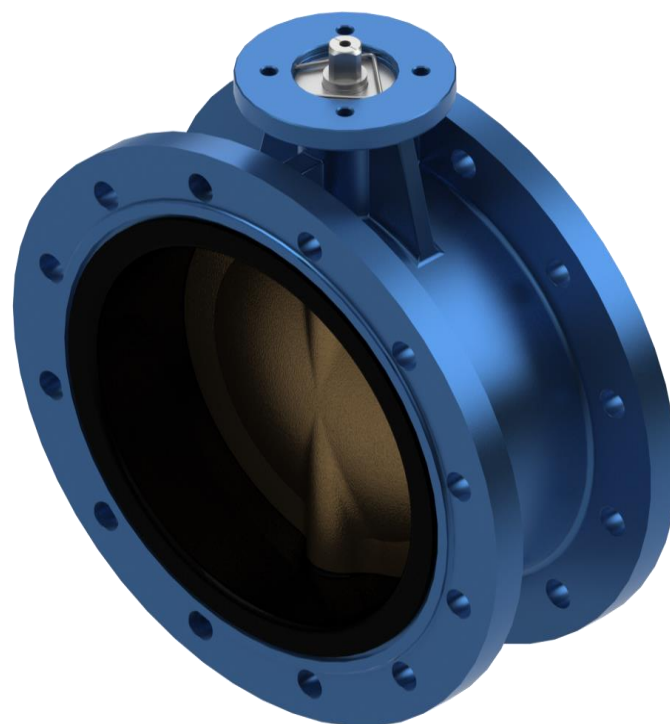


Body	Ductile Iron EN 1563 - GJS500-7
Shaft	Stainless Steel ASTM A182 F304
Disc	Bronze Alloy ASTM B148 C95500
Seat	EPDM (Vulcanised)
Temperature	-20°C up to +110°C
Tolerances	ISO 2768-M
Face to Face	EN 558 Series 13 ISO 5752 Series 13 API 609 Table 3
Pressure test according to:	EN 12266-1, ISO 5208: Body: 1.5×PN Seat: 1.1×PN
Mounting between flanges	PN10/16 ISO 7005, DIN 2501, EN 1092-1 ANSI class 150: ANSI B16.5
Tightness test	ISO 5208, zero leakage API 598

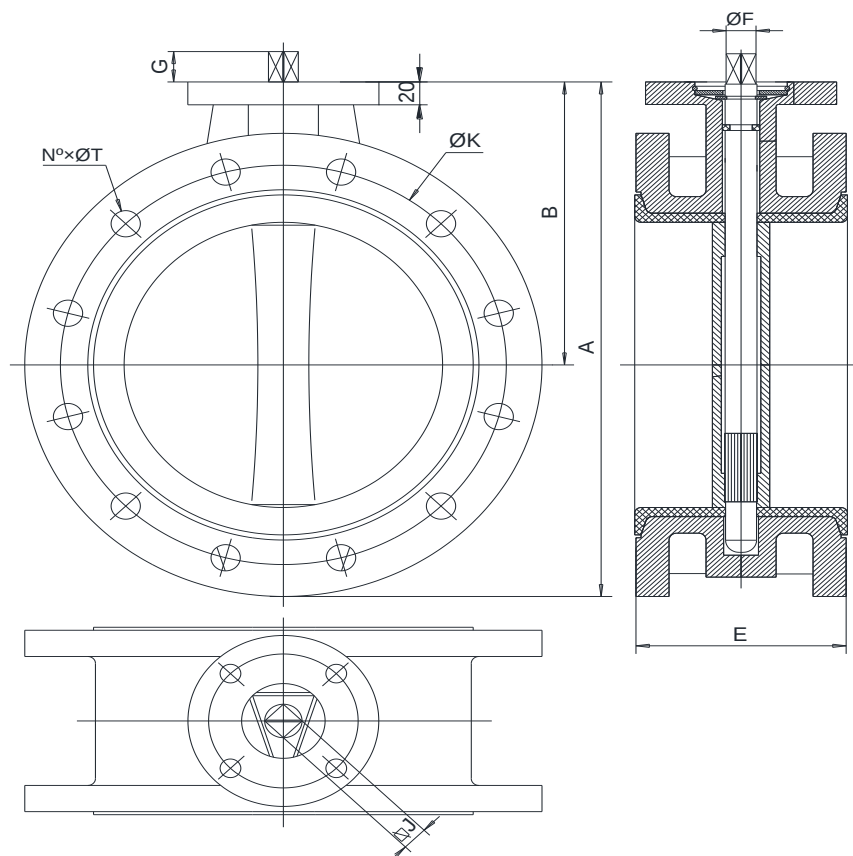

(Note) dimensions and standards may vary without announcement. Colours are orientative.

DN mm inch	A	B	D	E	F	G	J	PN10		PN16		ANSI150		ISO 5752 Connection	Weight Kg
								K	N°×ØT	K	N°×ØT	K	N°×ØT		
250 10"	452	251	150	165	25	24	19	350	12×23	355	12×27	362	12×26	F10	47
300 12"	523	280	150	178	28	24	22	400	12×23	410	12×27	431.8	12×26	F10	62
350 14"	569	304	170	190	28	29	22	460	16×23	470	16×27	476.3	12×29	F14	90
400 16"	643	340	170	216	35	29	27	515	16×27	525	16×30	539.8	16×29	F14	123