


FILTRO A Y – COPERCHIO BULLONATO – BRONZO / Ni-AI BRONZO FLANGIATO ANSI 150

Y STRAINER - BOLTED COVER - BRONZE / Ni-AI BRONZE - FLANGED ANSI 150

**WORKING
PRESSURES**
W.O.G. NON SHOCK
350 p.s.i.

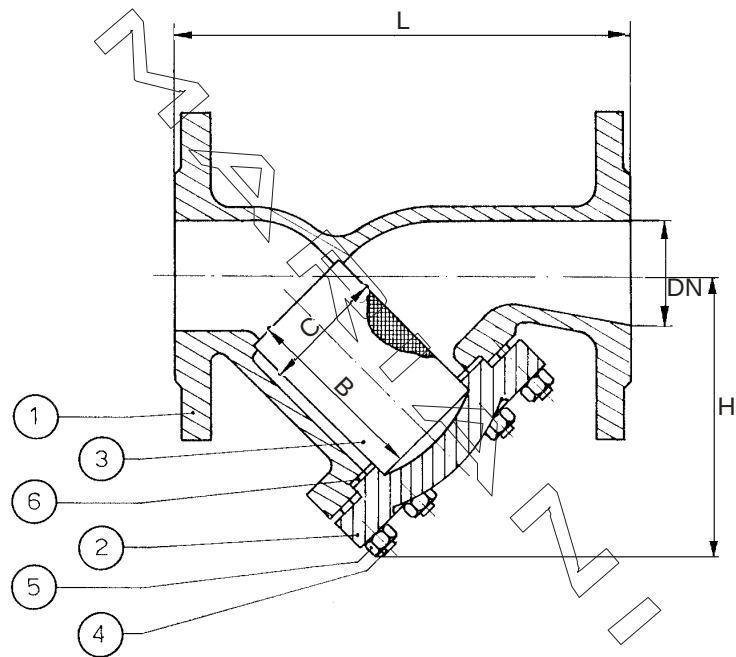

OPTIONAL FEATURES: 1) SPECIAL SCREEN PERFORATION
2) DRAIN PLUG ON THE COVER

	DESCRIZIONE	DESCRIPTION	BZ/INOX	AL/BZ -INOX	AL/BZ - MONEL
1	CORPO	BODY	ASTM B62	ASTM B148 C95800	ASTM B148 C95800
2	COPERCHIO	COVER	ASTM B62	ASTM B148 C95800	ASTM B148 C95800
3	FILTRO	SCREEN	ASTM A182 F316	ASTM A182 F316	MONEL 400
4	TIRANTE CORPO	BOLT	ASTM A193 B7 Z.P.	ASTM A193 B8 M	ASTM A193 B8 M
5	DADO	NUT	ASTM A194 2H Z.P.	ASTM A194 Gr. 8 M	ASTM A194 Gr. 8 M
6	GUARNIZIONE	GASKET	GRAPHITE TEFLONED	GRAPHITE TEFLONED	GRAPHITE TEFLONED

FLANGED ENDS: ANSI B16.5 (ANSI B16.24 THICKNESS) 150 FF/RF or DIN 2501 PN 10-16

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"
DN	15	20	25	32	40	50	65	80	100	125	150	200	250
L	130	150	160	180	200	203	290	241	292	400	406	495	622
H	70	100	100	100	100	200	130	260	296	220	370	480	590
B	58	64	64	70	87	145	142	176	215	221	257	339	397
C	25	25	30	37	45	55	71	83	105	132	155	205	260
RING	1	1	1	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Kg	3	4	5	7	8	11	16	25	38	35	71	105	160