

# Three Pieces Ball Valves IMF 1000 WOG

Size 1/4" - 4" (DN 8 - 100) Stainless Steel

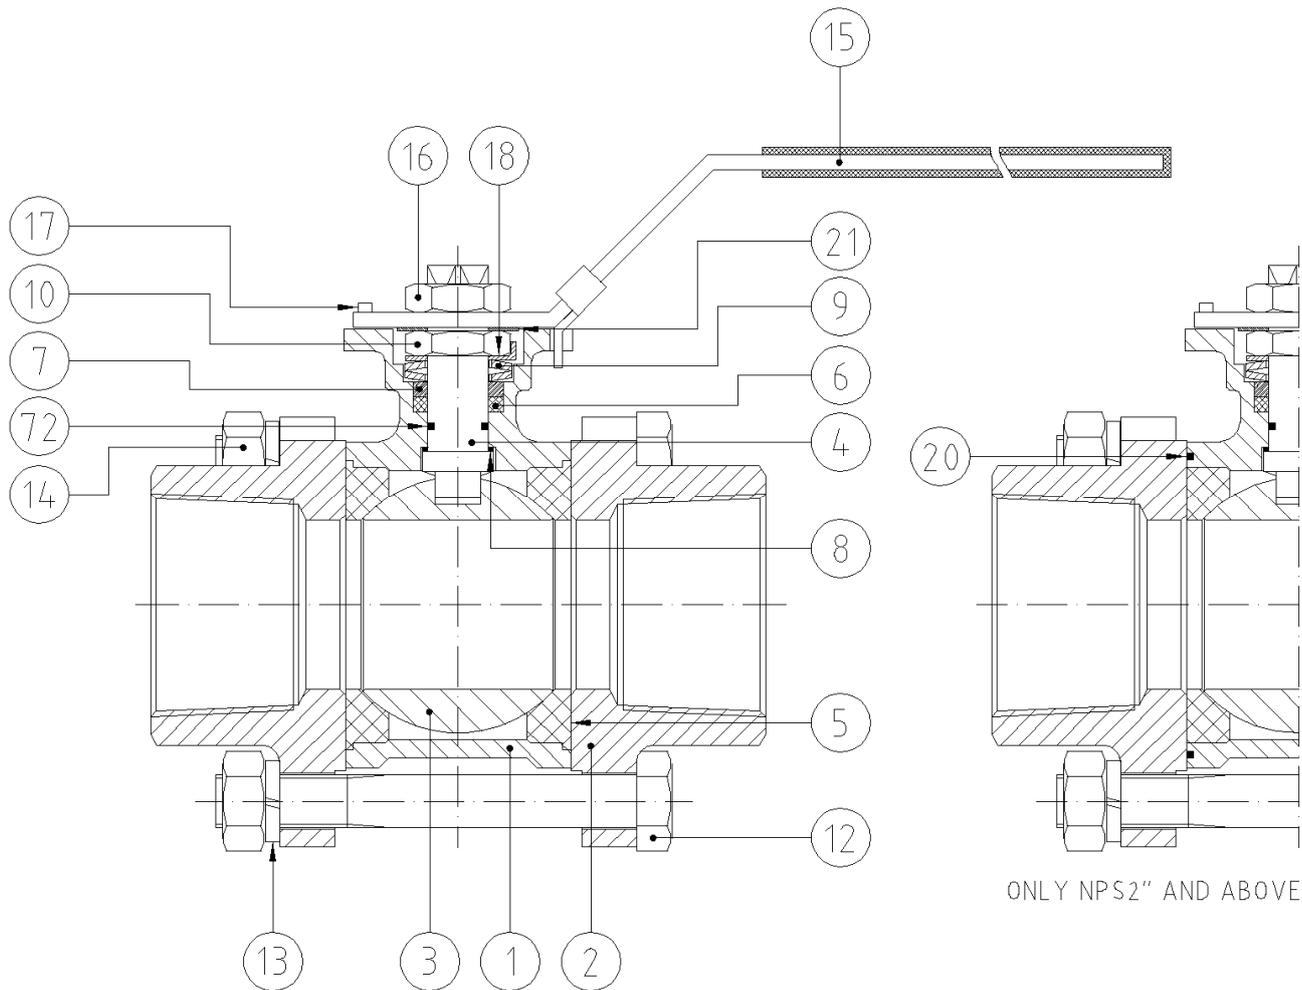


**Fig. 141IMF**  
**FULL BORE**  
Threaded according:  
**ASME B1.20.1 (NPT)**



# Three Pieces Ball Valves IMF 1000 WOG

## Parts and materials




Item	Description	Material
1	Body	AISI 316
2	Body connector	AISI 316
3	Ball	AISI 316
4	Stem	AISI 316
5	Seat ring	PTFE
6	Stem packing	PTFE
7	Ring	AISI 304
8	Stem thrust seal	PTFE
9	Belleville w asher	AISI 301
10	Gland Nut	AISI 304
12	Bolt	AISI 304
13	Washer	AISI 304
14	Nut	AISI 304
15	Handle	AISI 304+PVC
16	Handle nut	AISI 304
17	Stop pin	AISI 304
18	Locking w asher	AISI 304
20	Gasket	PTFE
21	Washer	AISI 304
72	O'ring	FKM

# Three Pieces Ball Valves IMF

## 1000 WOG

### Dimensions

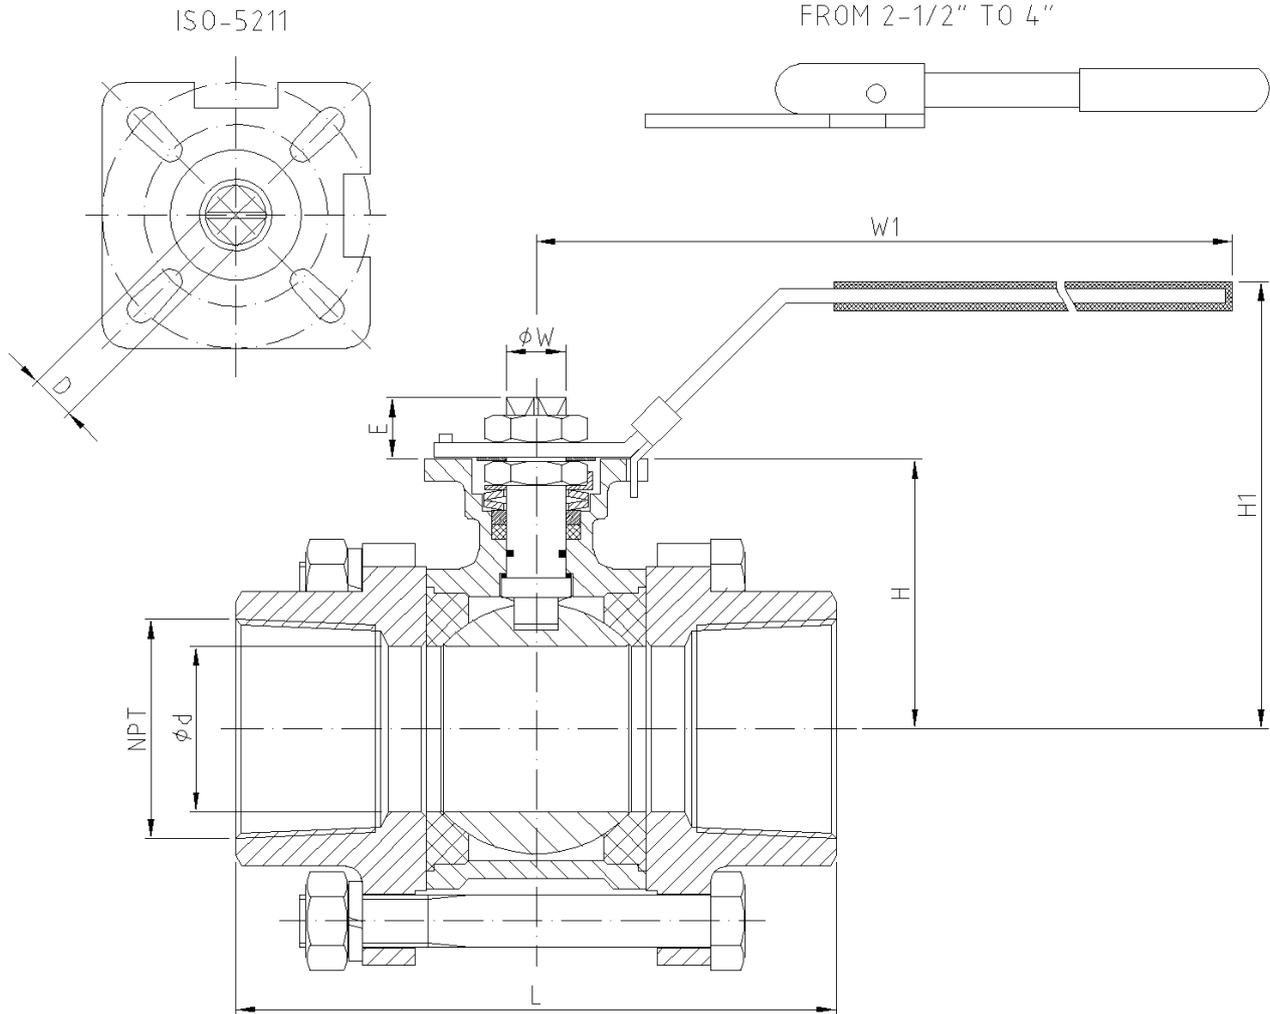

### Dimensions

SIZE	N.P.S.	Ød	L	W1	H	H1	E	D	φW	ISO 5211	WEIGHT
1/4" (DN 8)	1/4"	10,8	55	143	38,5	70	9	9	12	F04/03	0,58
3/8" (DN 10)	3/8"	12,5	60	143	38,5	70	9	9	12	F04/03	0,58
1/2" (DN 15)	1/2"	15	75	143	38,5	70	9	9	12	F04/03	0,57
3/4" (DN 20)	3/4"	20	80	143	47,5	79	9	9	12	F04/03	0,76
1" (DN 25)	1"	25	90	163	59	95	11	11	14	F05/04	1,03
1 1/4" (DN 32)	1 1/4"	32	110	163	63,5	100	11	11	14	F05/04	1,59
1 1/2" (DN 40)	1 1/2"	38	120	188	79	116	15	14	18	F07/05	2,3
2" (DN 50)	2"	50	140	188	86,5	124	15	14	18	F07/05	3,25
2 1/2" (DN 65)	2 1/2"	64	162	350	109,1	141	17	17	22	F10/07	6,9
3" (DN 80)	3"	76	184	350	117	149	17	17	22	F10/07	11
4" (DN 100)	4"	94	228	350	136	173	22	22	28	F12/10	19,2

(\*) Dimensions in mm and weight in kg.

#### Note:

Dimensions not subject to International Standards can vary in  $\pm 10\%$ . ICP reserves the right to change those dimensions without notice, due to they do not affect integrity and performance of the valves.



# Three Pieces Ball Valves IMF 1000 WOG

Torque, Kv, P&T Rating, Actreg Actuator

## Torque Values in Nm

VALVE SIZE	AT DIFFERENTIAL PRESSURE		VALVE SIZE	AT DIFFERENTIAL PRESSURE	
	63 bar			25 bar	
1/4" (DN 8)	4,9		2 1/2" (DN 65)	58,3	
3/8" (DN 10)	4,9		3" (DN 80)	86,8	
1/2" (DN 15)	4,9		4" (DN 100)	122,6	
3/4" (DN 20)	6,5				
1" (DN 25)	13,7				
1 1/4" (DN 32)	21,6				
1 1/2" (DN 40)	29,5				
2" (DN 50)	47				

## Kv Values in m<sup>3</sup>/h

VALVE SIZE	Kv	VALVE SIZE	Kv
1/4" (DN 8)	6,6	1 1/2" (DN 40)	80,0
3/8" (DN 10)	6,6	2" (DN 50)	150,0
1/2" (DN 15)	11,2	2 1/2" (DN 65)	265,0
3/4" (DN 20)	21,0	3" (DN 80)	415,0
1" (DN 25)	34,0	4" (DN 100)	780,0
1 1/4" (DN 32)	57,0		

## Pressure-Temperature

