


Body	Stainless Steel ASTM A351 CF 8M
Shaft	Stainless Steel ASTM A182 F316
Disc	Stainless Steel ASTM A351 CF 8M
Seat	EPDM
Temperature	-20°C up to +110°C
Tolerances	ISO 2768-M
Face to Face	EN 558 Series 20 ISO 5752 Series 20 API 609 Table 1 BS 5155 Series 4
Pressure test according to:	EN 12266-1, ISO 5208: Body: 1.5×PN Seat: 1.1×PN
Mounting between flanges	PN10/16 ISO 7005, DIN 2501, EN 1092-1 ANSI class 150: ANSI B16.5
Tightness test	ISO 5208, zero leakage API 598

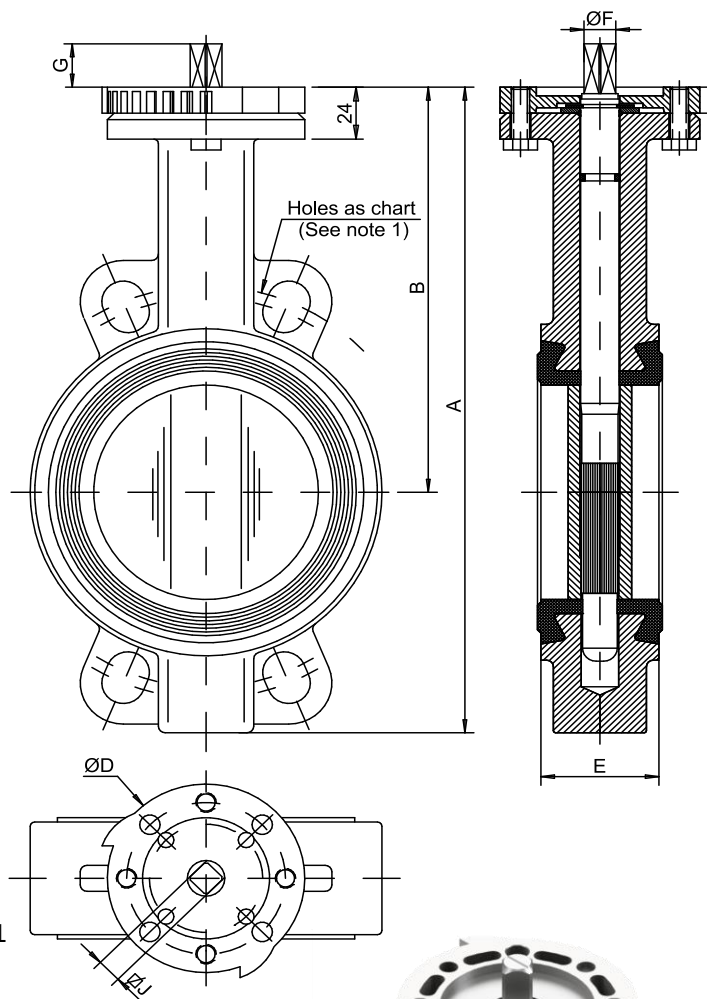

(Note 1) Holes as PN10-16 & ANSI 150Lb

(Note) dimensions and standards may vary without announcement. Colours are orientative.

DN		A	B	D	E	F	G	J	ISO 5752 Connection	Weight Kg
mm	inch									
32	1¼"	205	140	88	33	9.8	14	8	F5/F7	2
40	1½"	205	140	88	33	9.8	14	8	F5/F7	2
50	2"	228	156	88	43	9.8	14	8	F5/F7	3.5
65	2½"	248	161	88	46	12	16	9	F5/F7	4.5
80	3"	265	169	88	46	14	16	11	F5/F7	5
100	4"	298	187	88	52	14	20	11	F5/F7	6.5
125	5"	331	206	105	56	18	20	14	F7	8
150	6"	349	215	105	56	18	20	14	F7	9
200	8"	430	255	105	60	22	24	17	F7	15